

全体 数量 総括表							
レベル1 工事区分	レベル2 工 種	レベル3 種 別	レベル4 細 別	レベル5 規 格	単位	数 量	備 考
道路改良	土工						
		盛土工	盛土		m ³	30.0	25.4
		掘削工	掘削	土石	m ³	3.0	2.7
		床掘工	床掘	土石	m ³	20.0	21.8
		埋戻工	埋戻		m ³	4.0	4.4
		表土	表土剥ぎ取り		m ³	20.0	22.2
			表土埋戻		m ³	10.0	9.3
		盛土工	盛土	流用土	m ³	3.0	3.0
		盛土材		RC-40	m ³	30.0	29.8
		残土処分			m ³	30.0	34.2
	擁壁工						
		1号擁壁					L=17.4+29.6 =47m
			コンクリート	$\sigma_{ck} \geq 18\text{N/mm}^2$	m ³	13.000	13.35
			型枠	無筋構造物	m ²	61.00	67.18
			基礎碎石	RC-40 t=150mm	m ²	32.00	33.35
			目地材	t=10mm	m ²	1.00	1.33
			基面整正	土砂	m ²	32.00	33.35
		取合擁壁					L=0.8m
			コンクリート	$\sigma_{ck} \geq 18\text{N/mm}^2$	m ³	0.257	
			型枠	小型構造物	m ²	1.39	
			基礎碎石	RC-40 t=150mm	m ²	0.56	
		嵩上工					L=1.7m
			コンクリート	$\sigma_{ck} \geq 18\text{N/mm}^2$	m ³	0.040	
			型枠	小型構造物	m ²	0.50	
			鉄筋	D16 SD345	t	0.001	
			削孔		孔	4.00	

全体数量総括表							
レベル1 工事区分	レベル2 工 種	レベル3 種 別	レベル4 細 別	レベル5 規 格	単位	数 量	備 考
	排水構造物工						
		1号L号水路					L=2.0m
			コンクリート	$\sigma_{ck} \geq 18\text{N/mm}^2$	m^3	0.3	
			型枠	小型構造物	m^2	2.0	
			基礎碎石	RC-40 t=150mm	m^2	1.0	
		1号横断溝					L=8.0m
			本体(横断用)	400×400	個	4.000	
			グレーチング	横断用	組	4.000	
			インバート コンクリート	$\sigma_{ck} \geq 18\text{N/mm}^2$	m^3	0.300	
			基礎コンクリート	$\sigma_{ck} \geq 18\text{N/mm}^2$	m^3	0.600	
			型枠	小型	m^2	2.000	
			基礎碎石	RC-40 t=150mm	m^2	6.000	
	坂路工						
		盛土工	盛土	流用土	m^3	1.0	0.9
		表土	表土剥ぎ取り		m^3	1.0	1.2
			表土埋戻		m^3	1.0	0.5
		法面仕上げ			m^2	1.0	0.6
	舗装工						
		アスファルト舗装					
			表層	密粒度As t=4cm	m^2	173.00	173
				密粒度As t=3cm	m^2	10.00	10
			路盤	再生粒調碎石 t=10cm	m^2	70.00	70
			不陸整正	再生粒調碎石 t=6cm	m^2	103.00	103
			不陸整正	再生粒調碎石 t=7cm	m^2	10.00	10

迂回路 数量 総括表

[illegible]

測 量 法 線 -1 数 量 計 算 書											
測 点	距 離	盛 土			掘 削						摘 要
		断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	
No. 1 + 3.000	—	0.0			0.0						
No. 1 + 8.000	5.000	1.1	0.55	2.8	0.1	0.05	0.3				
No. 1 + 15.000	7.000	0.6	0.85	6.0	0.1	0.10	0.7				
No. 2	5.000	0.7	0.65	3.3	0.0	0.05	0.3				
No. 2 '											
No. 2 + 5.000	5.000										
No. 2 + 10.000	5.000										
合 計	27.000	12.1			1.3						

測 量 法 線 -1 数 量 計 算 書											
測 点	距 離	表土剥ぎ取り			表土埋戻			盛土(流用土)			摘 要
		断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	
No. 1 + 3.000	—	0.0			0.2						
No. 1 + 8.000	5.000	0.8	0.40	2.0	0.2	0.20	1.0				
No. 1 + 15.000	7.000	0.5	0.65	4.6	0.2	0.20	1.4				
No. 2	5.000	0.6	0.55	2.8	0.2	0.20	1.0				
No. 2 '								0.5			
No. 2 + 5.000	5.000							0.3	0.40	2.0	
No. 2 + 10.000	5.000							0.1	0.20	1.0	
合 計	27.000	9.4			3.4			3.0			

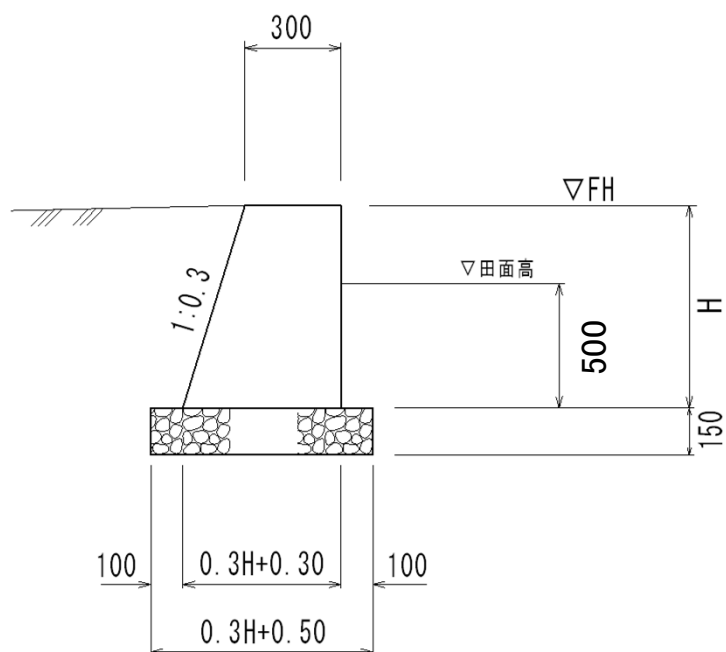
測量法線 -2 数量計算書											
測 点	距 離	盛 土			掘 削						摘 要
		断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	
No. 0	—	0.3			0.1						
No. 0 + 3.000	3.000	0.5	0.40	1.2	0.1	0.10	0.3				
No. 0 + 10.000	7.000	0.5	0.50	3.5	0.1	0.10	0.7				
No. 0 + 17.400	7.400	0.5	0.50	3.7	0.0	0.05	0.4				
No. 0 + 17.400	—	0.5			0.0						
No. 1	2.600	0.5	0.50	1.3	0.0	0.00	0.0				
No. 1 + 5.400	5.400	0.5	0.50	2.7	0.0	0.00	0.0				
No. 1 + 7.400	2.000	0.4	0.45	0.9	0.0	0.00	0.0				
No. 1 + 7.400	—	0.0			0.0						
No. 1 + 9.100	1.700	0.0	0.00	0.0	0.0	0.00	0.0				
合 計	29.100	13.3			1.4						

測 量 法 線 -2 数 量 計 算 書											
測 点	距 離	床 堀			埋 戻						摘 要
		断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	
No. 0	—	0.4			0.0						
No. 0 + 3.000	3.000	0.4	0.40	1.2	0.0	0.00	0.0				
No. 0 + 10.000	7.000	0.4	0.40	2.8	0.0	0.00	0.0				
No. 0 + 17.400	7.400	0.4	0.40	3.0	0.0	0.00	0.0				
No. 0 + 17.400	—	1.0			0.4						
No. 1	2.600	0.7	0.85	2.2	0.4	0.40	1.0				
No. 1 + 5.400	5.400	0.8	0.75	4.1	0.5	0.45	2.4				
No. 1 + 7.400	2.000	0.9	0.85	1.7	0.5	0.50	1.0				
No. 1 + 7.400	—	0.0			0.0						
No. 1 + 9.100	1.700	0.0	0.00	0.0	0.0	0.00	0.0				
合 計	29.100	15.0			4.4						

[illegible][illegible]

数量計算書

レベル2 :工種	擁壁工
レベル3 :種別	場所打擁壁工(1) 小型擁壁(0.5m≦H≦1m)
構造物名称	1号擁壁(測量法線-1)

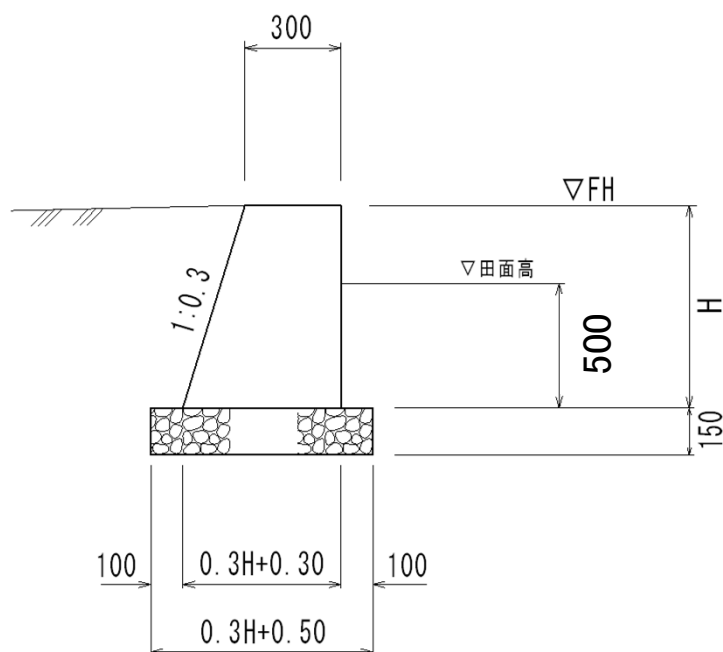
[illegible]

1 号 擁 壁 （ 測 量 法 線 -1 ）					数 量 計 算 書			
測 点	距 離	コンクリート			型 枠			摘 要
		算式	0.150×H ² + 0.300 ×H		算式	2.044 × H		
		断 面	平 均	数 量	断 面	平 均	数 量	
No 1 + 2.650	0.000	0.284			1.43			H=0.70m
No 1 + 3.000	0.350	0.284	0.2840	0.099	1.43	1.430	0.50	H=0.70m
No 1 + 8.000	5.000	0.284	0.2840	1.420	1.43	1.430	7.15	H=0.70m
No 1 + 15.000	7.000	0.284	0.2840	1.988	1.43	1.430	10.01	H=0.70m
No 2	5.000	0.284	0.2840	1.420	1.43	1.430	7.15	H=0.70m
小 計	17.350							

1 号 擁 壁 （ 測 量 法 線 -1 ） 数 量 計 算 書								
測 点	距 離	基礎碎石			基面整正（土砂）			摘 要
		算式	0.30 × H + 0.500		算式	0.30 × H + 0.500		
		断 面	平 均	数 量	断 面	平 均	数 量	
No 1 + 2.650	0.000	0.71			0.71			H=0.70m
No 1 + 3.000	0.350	0.71	0.710	0.25	0.71	0.710	0.25	H=0.70m
No 1 + 8.000	5.000	0.71	0.710	3.55	0.71	0.710	3.55	H=0.70m
No 1 + 15.000	7.000	0.71	0.710	4.97	0.71	0.710	4.97	H=0.70m
No 2	5.000	0.71	0.710	3.55	0.71	0.710	3.55	H=0.70m
小 計	17.350							

数量計算書

レベル2 :工種	擁壁工
レベル3 :種別	場所打擁壁工(1) 小型擁壁(0.5m≦H≦1m)
構造物名称	1号擁壁(測量法線-2)

[illegible]

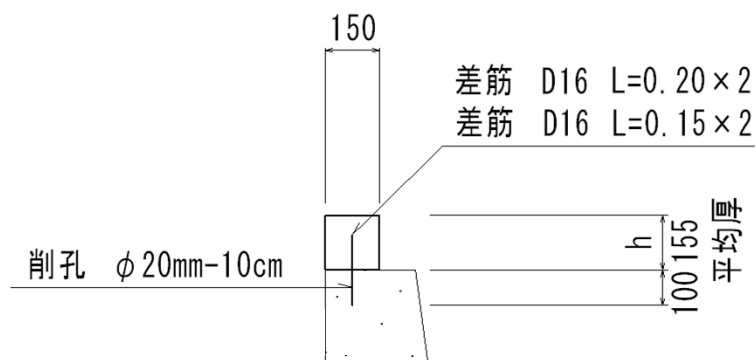
1 号 擁 壁 （ 測 量 法 線 -2 ） 数 量 計 算 書								
測 点	距 離	コンクリート			型 枠			摘 要
		算式	0.150×H ² + 0.300 ×H		算式	2.044 × H		
		断 面	平 均	数 量	断 面	平 均	数 量	
No 0	0.000	0.363			1.74			H=0.85m
No 0 + 3.000	3.000	0.284	0.3235	0.971	1.43	1.585	4.76	H=0.70m
No 0 + 3.750	0.750	0.284	0.2840	0.213	1.43	1.430	1.07	H=0.70m
No 0 + 10.000	6.250	0.284	0.2840	1.775	1.43	1.430	8.94	H=0.70m
No 1	10.100	0.284	0.2840	2.868	1.43	1.430	14.44	H=0.70m
No 1 + 5.400	5.400	0.284	0.2840	1.534	1.43	1.430	7.72	H=0.70m
No 1 + 6.100	0.900	0.284	0.2840	0.256	1.43	1.430	1.29	H=0.70m
No 1 + 7.400	1.200	0.309	0.2965	0.356	1.53	1.480	1.78	H=0.75m
小 計	27.600			7.973 m3			40.00 m ²	
No 0 + 17.400	0.000	0.201			1.08			H=0.53m
No 0 + 19.400	2.000	0.249	0.2250	0.450	1.29	1.185	2.37	H=0.63m
小 計	2.000			0.450 m3			2.37 m ²	
合 計	29.600			8.423 m3			42.37 m ²	

1 号 擁 壁 （ 測 量 法 線 -2 ） 数 量 計 算 書								
測 点	距 離	基礎碎石			基面整正（土砂）			摘 要
		算式	0.30 × H + 0.500		算式	0.30 × H + 0.500		
		断 面	平 均	数 量	断 面	平 均	数 量	
No 0	0.000	0.76			0.76			H=0.85m
No 0 + 3.000	3.000	0.71	0.735	2.21	0.71	0.735	2.21	H=0.70m
No 0 + 3.750	0.750	0.71	0.710	0.53	0.71	0.710	0.53	H=0.70m
No 0 + 10.000	6.250	0.71	0.710	4.44	0.71	0.710	4.44	H=0.70m
No 1	10.100	0.71	0.710	7.17	0.71	0.710	7.17	H=0.70m
No 1 + 5.400	5.400	0.71	0.710	3.83	0.71	0.710	3.83	H=0.70m
No 1 + 6.100	0.900	0.71	0.710	0.64	0.71	0.710	0.64	H=0.70m
No 1 + 7.400	1.200	0.73	0.720	0.86	0.73	0.720	0.86	H=0.75m
小 計	27.600			19.68 m ²			19.68 m ²	
No 0 + 17.400	0.000	0.66			0.66			H=0.53m
No 0 + 19.400	2.000	0.69	0.675	1.35	0.69	0.675	1.35	H=0.63m
小 計	2.000			1.35 m ²			1.35 m ²	
合 計	29.600			21.03 m ²			21.03 m ²	

[illegible][illegible]

数量計算書

レベル2 :工種	擁壁工
レベル3 :種別	場所打擁壁工(1) 小型擁壁(0.5m≦H≦1m)
構造物名称	嵩上工

[illegible]

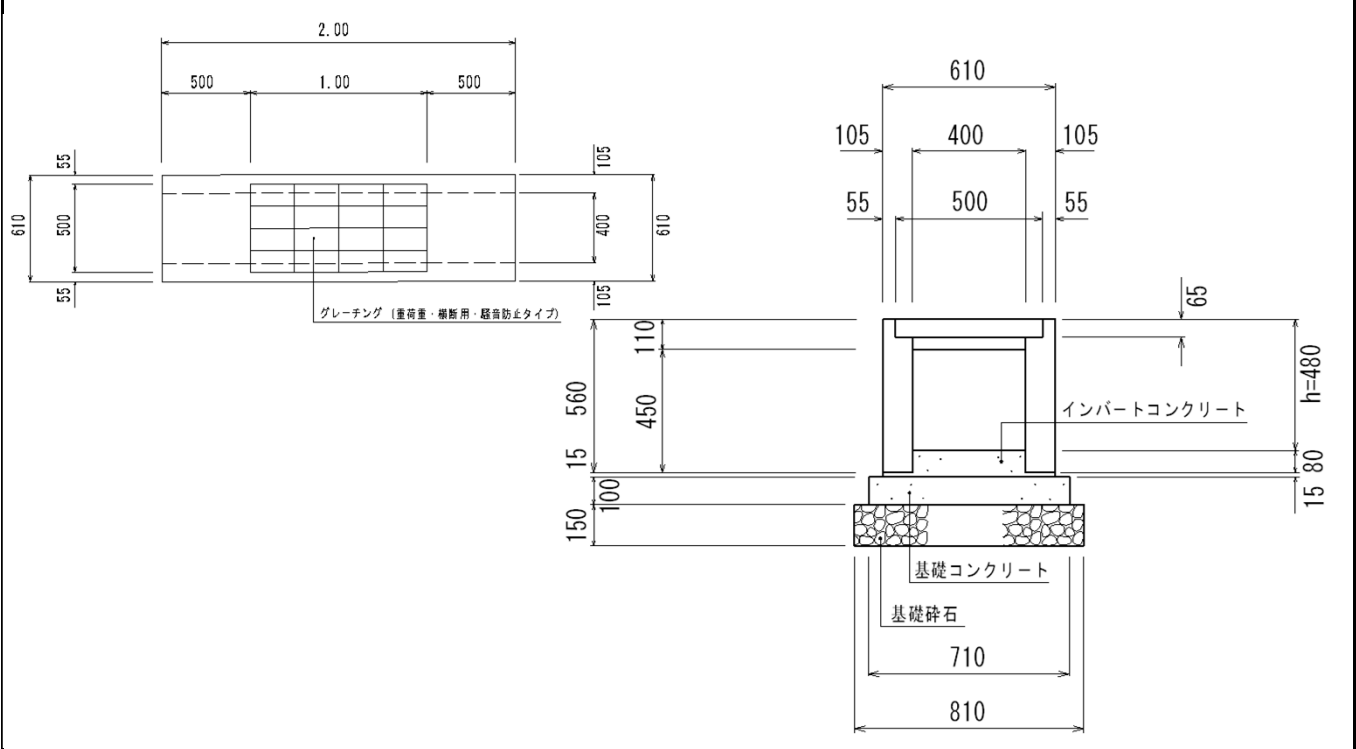
[illegible][illegible]

数 量 計 算 書

[illegible]

数 量 計 算 書

レベル2 : 工種	排水構造物工
レベル3 : 種別	プレキャスト水路工
構造物名称	1号横断溝



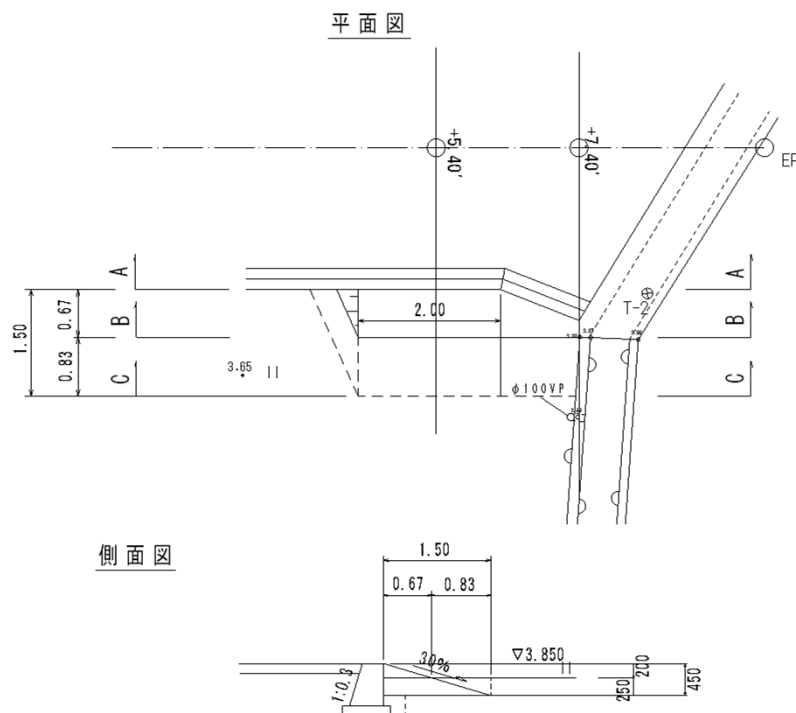
名 称	規 格	算 式	単位	計
	延長	NO. 0+19.40～NO. 1+7.40	m	8.0
(1式当たり)				
本体(横断用)	400×400		個	4
グレーチング	重荷重・横断用 騒音防止タイプ		組	4
インバートコンクリート	$\sigma_{ck}=18\text{N/mm}^2$	$(0.400 \times 0.080 + 0.610 \times 0.015) \times 8.00$	m ³	0.329
基礎コンクリート	$\sigma_{ck}=18\text{N/mm}^2$	$0.710 \times 0.100 \times 8.0$	m ³	0.568
同上型枠	小型	$0.100 \times 2 \times 8.0$	m ²	1.60
基礎碎石	RC-40 t=150mm	0.810×8.0	m ²	6.48
基面整正	土砂	0.810×8.0	m ²	6.48

数量計算書

レベル2 : 工種 附帯工

レベル3 :種別 1号坂路工

构造物名称	规格	数量	单位	备注
1. 新建				
2. 改建				
3. 拆除				
4. 其他				

[illegible]

1 号坂路土工数量計算書

測点	距離	法面仕上げ									摘要
		断面	平均	数量	断面	平均	数量	断面	平均	数量	
No. A	—	0.8									
No. B	0.670	0.4	0.60	0.4							
No. C	0.830	0.0	0.20	0.2							
合計	1.500			0.6							

[illegible]

測量法線-2																
数					量					計			算		書	
測 点	距 離	コンクリート取壊し												摘 要		
		断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量	断 面	平 均	数 量			
No. 0	—	0.45														
No. 0 + 3.000	3.000	0.26	0.355	1.07												
No. 0 + 10.000	7.000	0.25	0.255	1.79												
No. 0 + 17.400	7.400	0.21	0.230	1.70												
No. 0 + 17.400	—	0.44														
No. 1	2.600	0.44	0.440	1.14												
No. 1 + 5.400	5.400	0.44	0.440	2.38												
No. 1 + 7.400	2.000	0.66	0.550	1.10												
No. 1 + 7.400	—	0.66														
No. 1 + 9.100	1.700	0.00	0.330	0.56												

仮設工 数量 総括 表

[illegible]